


The heart of your building™



KONE Montanari

FACT SHEET



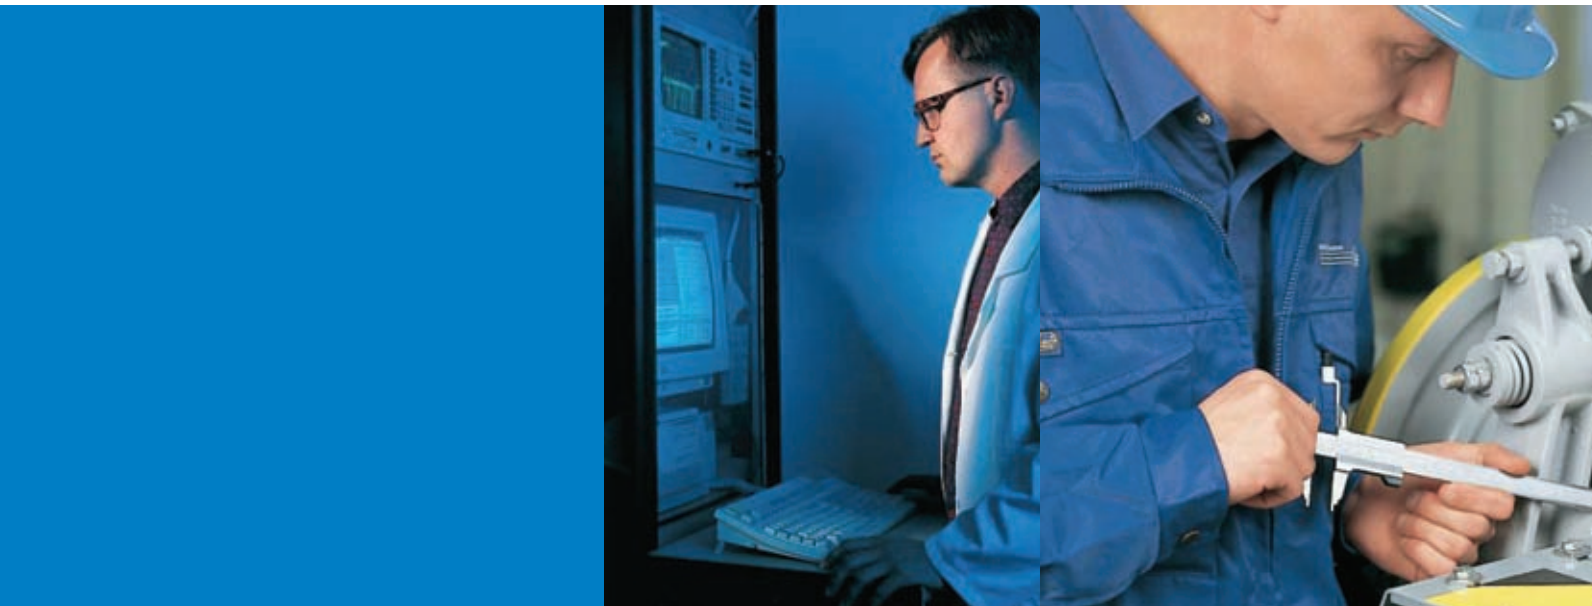

Quieter

1. KONE Gears are specifically designed to reduce running noise
2. Each machine is equipped with special insulating polyurethane shock absorbers

Enhanced Safety

1. The new KONE gears are equipped with dual brake system.
2. Asbestos free brake linings
3. Ascending overspeed protection with TSS brakes
4. New ropes are always installed with new KONE gears

KONE gears for every application

All KONE gears adhere to the same design concept, made to high quality standards and characteristics. The Montanari range covers most existing applications from low end static loads of 2,000Kg up to 12,000Kg.

The full range includes the

| | |
|--------------|-------------------------|
| M73 / M73B | Max static load 2000Kg |
| M83 / M83B | Max static load 3200Kg |
| M93 / M93B | Max static load 7000Kg |
| M104 / M104B | Max static load 12000Kg |

KONE Montanari

Main Specification

| | |
|----------------|------------------|
| Speed | 1.8m/s (maximum) |
| Power capacity | Up to 44kW |
| Travel | 35 Metres |
| Static Load | Up to 12,000kg |
| Roping | 1:1 and 2:1 CSW |
| Motor Voltages | 400V and 360V |
| Distribution | 3 phase, 50Hz |
| Sheave Brake | Yes |

