

Opening requirements and track arrangements

Side room requirements

Push operated = 150mm
 Chain operated = 250mm
 Electric operated = 350mm



NB. The structure must be capable of carrying a door load of 25kgs m². We recommend the hangers do not exceed 1000mm length.

Low headroom (Up to 5000 x 4000. Max 16m²)

Standard available tracks slopes:

4, 7, 10, 13, 16, 20, 25, 30, 35, 40, 45 degrees

NB. Bottom panel will hang below opening 50–60mm

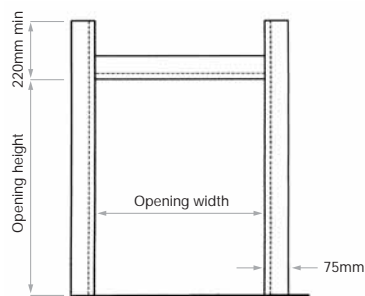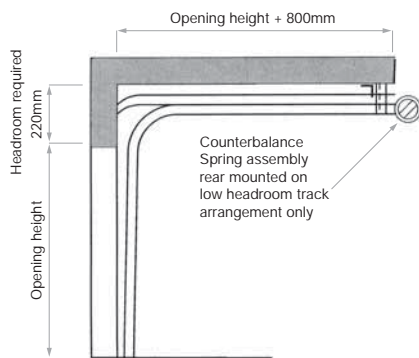

Standard lift (Up to 7000 x 6000. Max 36m²)



Standard available tracks slopes:

4, 7, 10, 13, 16, 20, 25, 30, 35, 40, 45 degrees


425mm for doors up to 3700 high

500mm for doors up to 5500 high


600mm for doors up to 6000 high

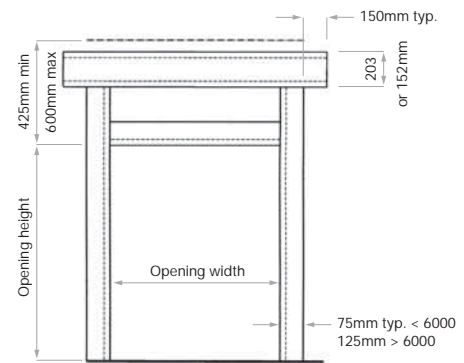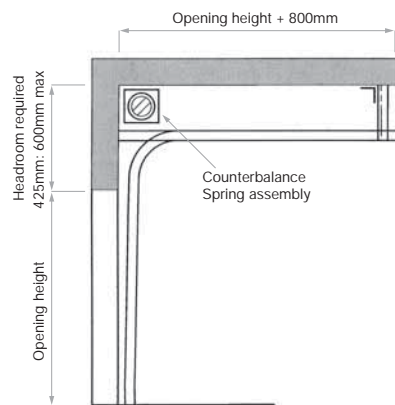

High lift (Up to 7000 x 6000. Max size 36m²)
 Standard available tracks slopes:
 4, 7, 10, 13, 16, 20, 25, 30, 35, 40, 45 degrees

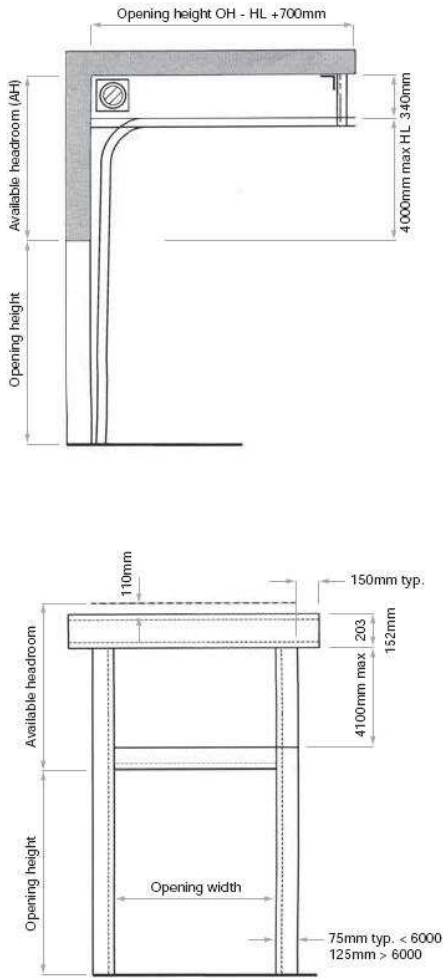

Vertical lift (Up to 7000 x 6000. Max size 36m²)

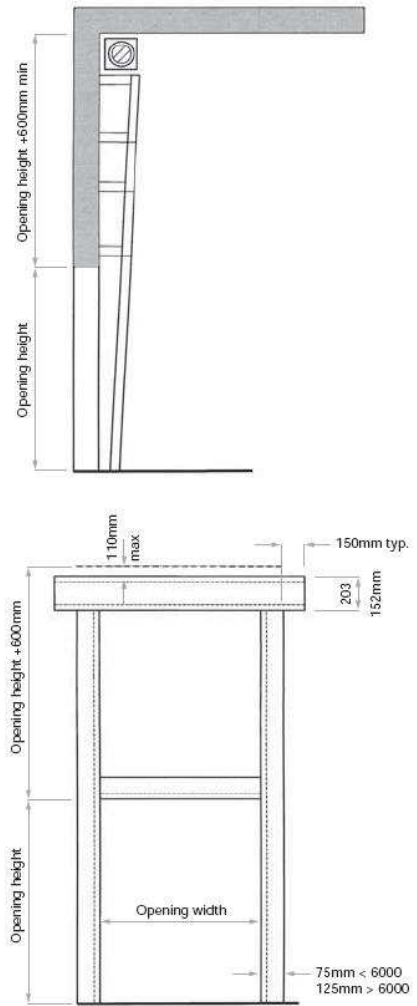

For comprehensive drawings contact our technical department.