


KONE REVIVE KSS 610

Modernization of elevator signalization

This flush-mounted signalization solution is designed for use in residential and commercial buildings.

Saving energy

KONE has developed solutions that reduce energy consumption by dimming the signalization in the car at a preset time after the elevator has been used. This reduces signalization electricity consumption by up to 30% depending on the number of screens and the graphics of the screens.

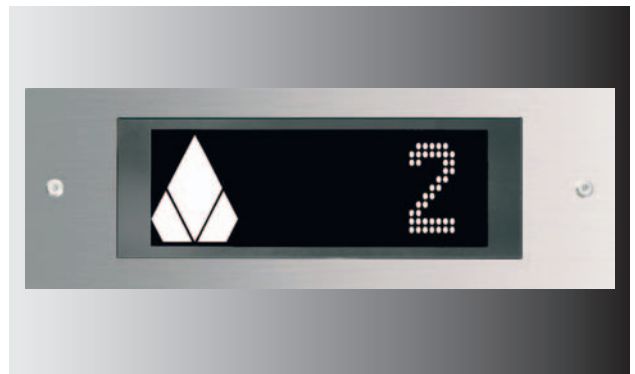

Key Benefits

Eco-efficient

- Eco-efficient white colored LED call registration illumination
- Dimming feature when elevator not in use


Safe


- Increases safety and accessibility of elevator users
- Complies with EN81-70 (European Accessibility Standard)
- KONE Remote Monitoring for two-way emergency communication with KONE Customer Care Center*
- Intercom systems*

Versatile and stylish

- Serial electrical interface
- Flush mounting with flexible face plate size
- Available with choice of finishes (satin and polished stainless steel)
- Landing position indicator available with adjustable arrival gong volumes and text indication fields
- Key fob operation: call or disable elevator remotely*
- PIN Code locking feature removing the need for key switches*

* Optional

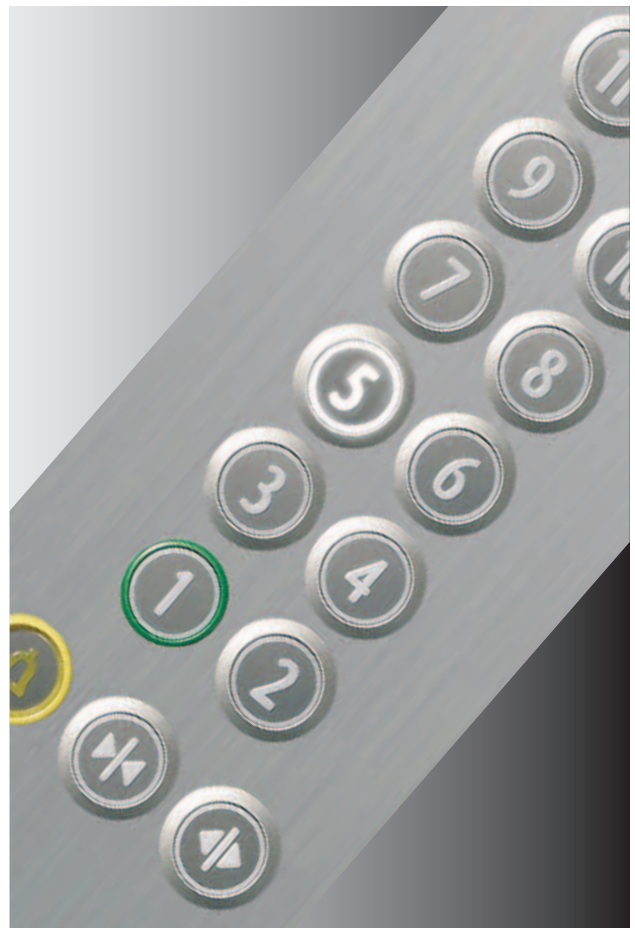

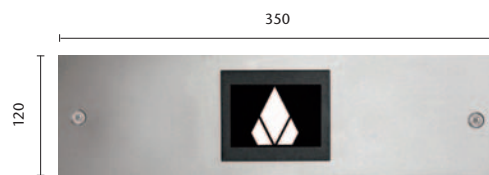

KSH 610: White arrow




KSH 612: White arrow and dot matrix display



KSI 615: White arrow and LCD display

KSL 610: Round milky buttons with white call acceptance light

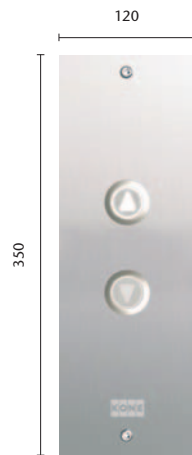

Configurations

- Landing hall lantern horizontally or vertically mounted
- Landing position indicator available with dot matrix or LCD displays either horizontally or vertically mounted
- Car Operating Panel available in three versions, without indicator, with dot matrix or LCD displays
- Standard COP devices include: Alarm Button, Door Open Button and Emergency Light
- COP devices can include: Door Close, Key Switches, Braille Marking Tags, KONE Remote Monitoring (KRM) and intercom interface*
- To comply with EN81-70 max number of car calls per COP = 28

* Optional

All dimensions are shown in millimeters.

[For more information go to KONE.com](http://KONE.com)