


Dedicated to People Flow™

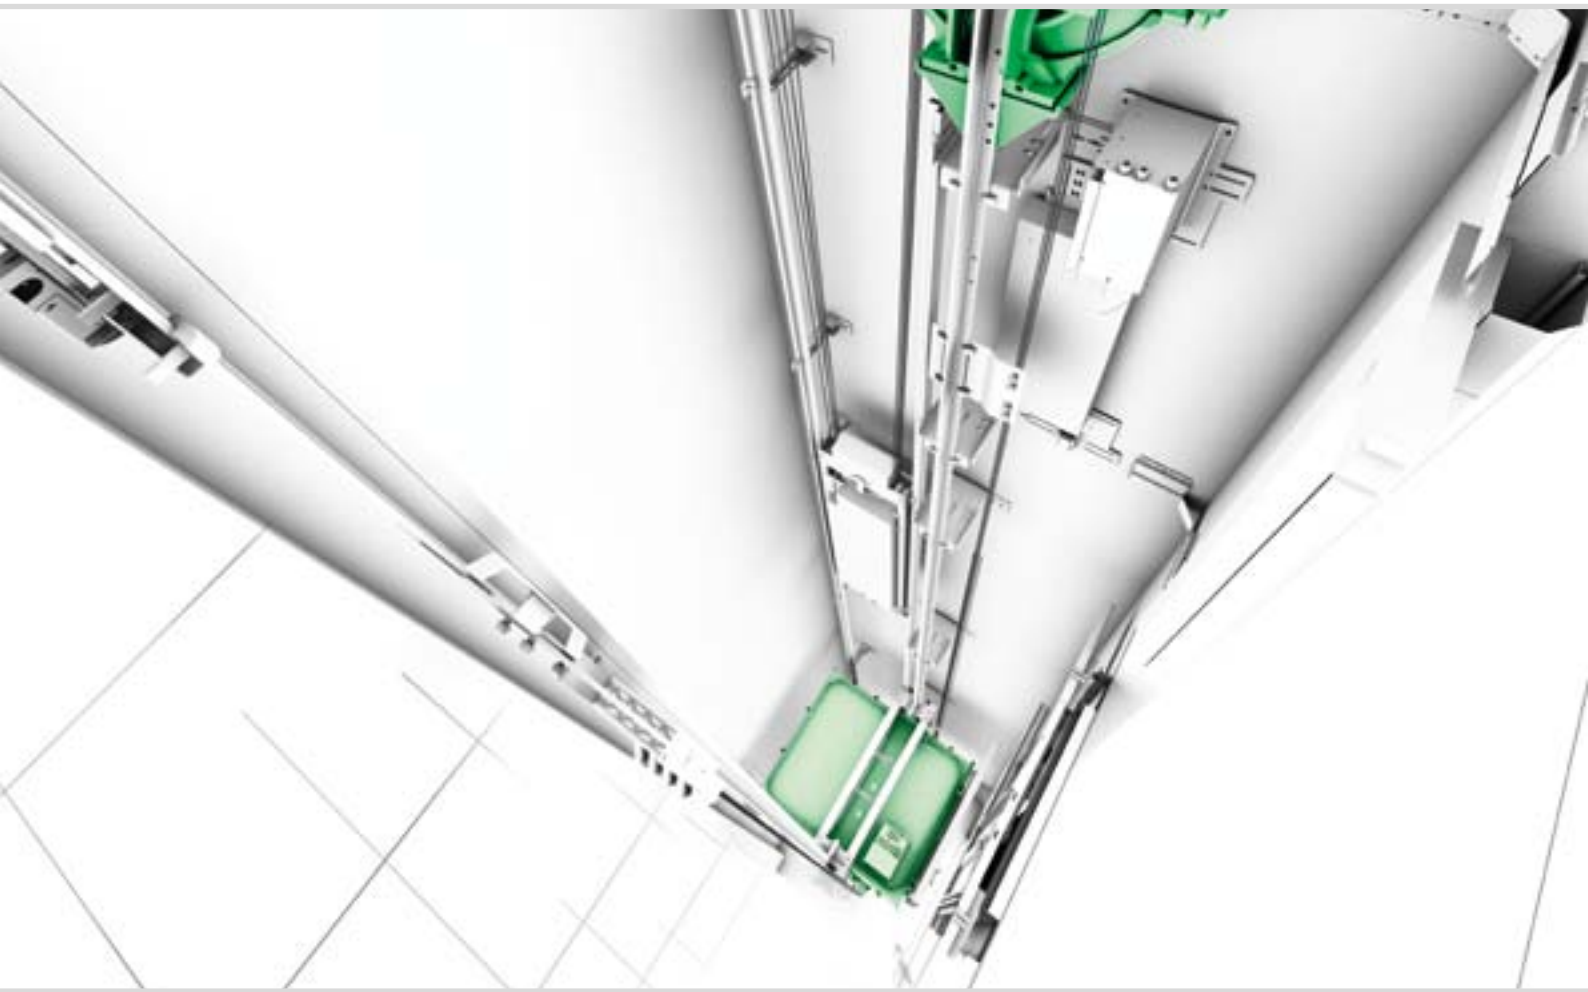

SHAFT DIMENSIONS 1.0-3.0m/s; 450-2500kg



KONE MonoSpace® Special

VERTICAL SHAFT DIMENSIONS

Rated load [kg]	Speed [m/s]	Headroom height (SH) [mm]	Pit height (PH) [mm]
320 – 630	1.0	CH + 1400	1240
630 – 1000	1.6	CH + 1600 (3750)	1550
630 – 1000	2.0	CH + 1800 (4100)	1700
800 – 1000	1.0	CH + 1400	1) 1280
1150	1.0	CH + 1450 (3750)	1400
1150	1.6	CH + 1600 (3750)	2) 1550
1150	2.0	CH + 1800 (4100)	3) 1700
1275 – 1600	1.0	CH + 1450 (3850)	8)5) 1450
1800 – 2500	1.0	CH + 1450 (3850)	1600
1275 – 1350	1.6	CH + 1600 (3850)	7) 1600
1600	1.6	CH + 1600 (3850)	3) 1700
1275 – 1600	2.0	CH + 1800 (4200)	2000
1275 – 1800	2.5	CH + 2300 (4500)	2400
1000 – 1600	3.0	CH + 2500 (4800)	6) 3100
1800	1.6	CH + 1600 (3850)	1900
1800	2.0	CH + 1800 (4200)	2100
2000	1.6	CH + 1600 (3850)	2000
2000	2.0	CH + 1800 (4200)	2200
2000	2.5	CH + 2300 (4500)	2500
2275	1.6	CH + 1600 (3850)	1850
2500	1.6	CH + 1600 (3850)	1850

Notes:

- 1) Low pit option
- 2) When travel H > 50 m, PHmin = 1650
- 3) When travel H > 50 m, PHmin = 1800
- 5) When sling CF10UPM PHmin = 1400
- 6) When travel H > 90 m, PHmin = 3200
- 7) If BB < 1600 and travel H ≤ 50 m, PHmin = 1550
- 8) When travel H > 30 m, PHmin = 1500

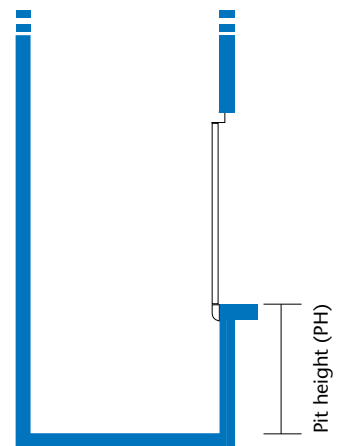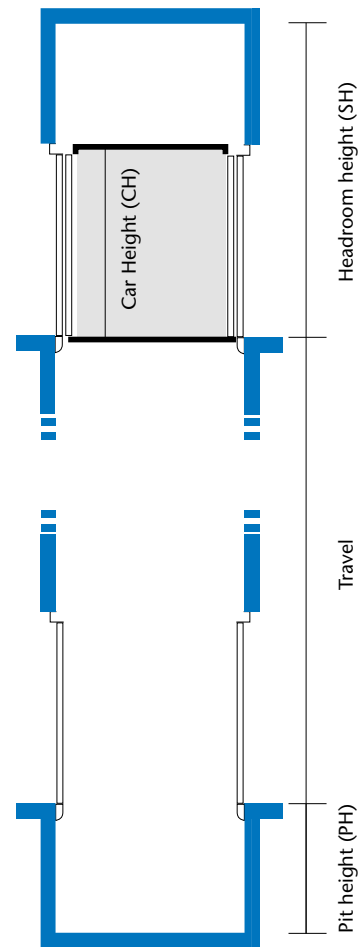


HORIZONTAL SHAFT DIMENSIONS

Single entrance

Narrow frame doors


Side opening

Speed (m/s)	Persons / rated load (kg)	BB × DD (mm)	LL (mm)	FW (mm)	FW1 (mm)	WW × WD (mm)
1	6 / 450	1000 × 1200	800	450	150	1550 × 1600
1	6 / 450	1000 × 1200	900	450	150	1650 × 1600
1	6 / 480	950 × 1300	800	400	150	1500 × 1700
1	6 / 480	950 × 1300	900	450	150	1650 × 1700
1	6 / 480	1000 × 1250	800	400	150	1500 × 1700
1	6 / 480	1000 × 1250	900	450	150	1650 × 1700
1	8 / 630	1100 × 1400	800	550	150	1650 × 1800
1	8 / 630	1100 × 1400	900	450	150	1650 × 1800
1	12 / 900	1400 × 1500	900	750	150	1950 × 1900
1	13 / 1000	1100 × 2100	800	550	150	1650 × 2500
1	13 / 1000	1100 × 2100	900	450	150	1650 × 2500
1	13 / 1000	1100 × 2100	1000	500	150	1800 × 2500
1	15 / 1150	1200 × 2100	800	150	550	1750 × 2500
1	15 / 1150	1200 × 2100	900	150	450	1750 × 2500
1	15 / 1150	1200 × 2100	1000	150	500	1800 × 2500
1.6	6 / 450	1000 × 1200	800	450	150	1550 × 1600
1.6	6 / 450	1000 × 1200	900	450	150	1650 × 1600
1.6	6 / 480	950 × 1300	800	400	150	1500 × 1700
1.6	6 / 480	950 × 1300	900	450	150	1650 × 1700
1.6	6 / 480	1000 × 1250	800	400	150	1500 × 1700
1.6	6 / 480	1000 × 1250	900	450	150	1650 × 1700
1.6	8 / 630	1100 × 1400	800	550	150	1650 × 1900
1.6	8 / 630	1100 × 1400	900	450	150	1650 × 1900
1.6	12 / 900	1400 × 1500	900	750	150	1950 × 1950
1.6	13 / 1000	1100 × 2100	800	550	150	1650 × 2500
1.6	13 / 1000	1100 × 2100	900	450	150	1650 × 2500
1.6	13 / 1000	1100 × 2100	1000	500	150	1800 × 2500
1.6	15 / 1150	1200 × 2100	800	150	550	1750 × 2500
1.6	15 / 1150	1200 × 2100	900	150	450	1750 × 2500
1.6	15 / 1150	1200 × 2100	1000	150	500	1800 × 2500
2	8 / 630	1100 × 1400	800	150	550	1650 × 1900
2	8 / 630	1100 × 1400	900	150	450	1650 × 1900
2	12 / 900	1400 × 1500	900	750	150	1950 × 1950
2	13 / 1000	1100 × 2100	800	150	550	1650 × 2500
2	13 / 1000	1100 × 2100	900	150	450	1650 × 2500
2	13 / 1000	1100 × 2100	1000	150	500	1800 × 2500
2	15 / 1150	1200 × 2100	800	150	550	1750 × 2500
2	15 / 1150	1200 × 2100	900	150	450	1750 × 2500
2	15 / 1150	1200 × 2100	1000	150	500	1800 × 2500
1	17 / 1275	1200 × 2300	1100	175	575	2000 × 2700
1	21 / 1600	1400 × 2400	1300	200	650	2300 × 2800
1	26 / 2000	1500 × 2700	1300	175	675	2300 × 3100
1	30 / 2275	1700 × 2600	1300	325	675	2450 × 3050
1	33 / 2500	1800 × 2700	1400	275	725	2550 × 3150
1.6	17 / 1275	1200 × 2300	1100	175	575	2000 × 2700
1.6	21 / 1600	1400 × 2400	1300	200	650	2300 × 2800
1.6	26 / 2000	1500 × 2700	1300	175	675	2300 × 3100
1.6	30 / 2275	1700 × 2600	1300	325	675	2450 × 3050
1.6	33 / 2500	1800 × 2700	1400	275	725	2550 × 3150
2	17 / 1275	1200 × 2300	1100	175	575	2000 × 2700
2	21 / 1600	1400 × 2400	1300	200	650	2300 × 2800
2	26 / 2000	1500 × 2700	1300	175	675	2300 × 3100



Center opening

Speed (m/s)	Persons / rated load (kg)	BB × DD (mm)	LL (mm)	FW (mm)	FW1 (mm)	WW × WD (mm)
1	8 / 630	1100 × 1400	800	425	425	1800 × 1700
1	8 / 630	1100 × 1400	900	475	475	2000 × 1700
1	10 / 800	1350 × 1400	800	475	475	1900 × 1800
1	10 / 800	1350 × 1400	900	450	450	1950 × 1800
1	12 / 900	1400 × 1500	800	500	500	1950 × 1850
1	12 / 900	1400 × 1500	900	450	450	1950 × 1850
1	13 / 1000	1100 × 2100	800	400	400	1750 × 2400
1	13 / 1000	1100 × 2100	900	450	450	1950 × 2400
1	13 / 1000	1100 × 2100	1000	500	500	2150 × 2400
1	13 / 1000	1600 × 1400	900	550	550	2150 × 1850
1	13 / 1000	1600 × 1400	1000	500	500	2150 × 1850




Single entrance:

Speed (m/s)	Persons / rated load (kg)	BB × DD (mm)	LL (mm)	FW (mm)	FW1 (mm)	WW × WD (mm)
1	13 / 1000	1600 × 1400	1100	550	550	2350 × 1850
1	15 / 1150	1200 × 2100	800	400	400	1750 × 2400
1	15 / 1150	1200 × 2100	900	450	450	1950 × 2400
1	15 / 1150	1200 × 2100	1000	500	500	2150 × 2400
1	15 / 1150	1600 × 1550	900	550	550	2150 × 1850
1	15 / 1150	1600 × 1550	1000	500	500	2150 × 1850
1	15 / 1150	1600 × 1550	1100	550	550	2350 × 1850
1	17 / 1275	2000 × 1400	1100	830	620	2700 × 2000
1	21 / 1600	2100 × 1600	1100	880	670	2800 × 2100
1	24 / 1800	2350 × 1600	1200	955	745	3050 × 2100
1.6	8 / 630	1100 × 1400	800	400	400	1750 × 1800
1.6	8 / 630	1100 × 1400	900	450	450	1950 × 1800
1.6	10 / 800	1350 × 1400	800	475	475	1900 × 1800
1.6	10 / 800	1350 × 1400	900	450	450	1950 × 1800
1.6	12 / 900	1400 × 1500	800	500	500	1950 × 1850
1.6	12 / 900	1400 × 1500	900	450	450	1950 × 1850
1.6	13 / 1000	1100 × 2100	800	400	400	1750 × 2400
1.6	13 / 1000	1100 × 2100	900	450	450	1950 × 2400
1.6	13 / 1000	1100 × 2100	1000	500	500	2150 × 2400
1.6	13 / 1000	1600 × 1400	900	550	550	2150 × 1850
1.6	13 / 1000	1600 × 1400	1000	500	500	2150 × 1850
1.6	13 / 1000	1600 × 1400	1100	550	550	2350 × 1850
1.6	15 / 1150	1200 × 2100	800	400	400	1750 × 2400
1.6	15 / 1150	1200 × 2100	900	450	450	1950 × 2400
1.6	15 / 1150	1200 × 2100	1000	500	500	2150 × 2400
1.6	15 / 1150	1600 × 1550	900	550	550	2150 × 1850
1.6	15 / 1150	1600 × 1550	1000	500	500	2150 × 1850
1.6	15 / 1150	1600 × 1550	1100	550	550	2350 × 1850
1.6	17 / 1275	2000 × 1400	1100	830	620	2700 × 2000
1.6	21 / 1600	2100 × 1600	1100	880	670	2800 × 2100
1.6	24 / 1800	2350 × 1600	1200	955	745	3050 × 2100
2	8 / 630	1100 × 1400	800	400	400	1750 × 1800
2	8 / 630	1100 × 1400	900	450	450	1950 × 1800
2	10 / 800	1350 × 1400	800	475	475	1900 × 1800
2	10 / 800	1350 × 1400	900	450	450	1950 × 1800
2	12 / 900	1400 × 1500	800	500	500	1950 × 1850
2	12 / 900	1400 × 1500	900	450	450	1950 × 1850
2	13 / 1000	1100 × 2100	800	400	400	1750 × 2400
2	13 / 1000	1100 × 2100	900	450	450	1950 × 2400
2	13 / 1000	1100 × 2100	1000	500	500	2150 × 2400
2	13 / 1000	1600 × 1400	900	550	550	2150 × 1850
2	13 / 1000	1600 × 1400	1000	500	500	2150 × 1850
2	13 / 1000	1600 × 1400	1100	550	550	2350 × 1850
2	15 / 1150	1200 × 2100	800	400	400	1750 × 2400
2	15 / 1150	1200 × 2100	900	450	450	1950 × 2400
2	15 / 1150	1200 × 2100	1000	500	500	2150 × 2400
2	15 / 1150	1600 × 1550	900	550	550	2150 × 1850
2	15 / 1150	1600 × 1550	1000	500	500	2150 × 1850
2	15 / 1150	1600 × 1550	1100	550	550	2350 × 1850
1	17 / 1275	2000 × 1400	1100	620	830	2700 × 2000
1	21 / 1600	2100 × 1600	1100	670	880	2800 × 2100
1	24 / 1800	2350 × 1600	1200	745	955	3050 × 2100
1	26 / 2000	2350 × 1700	1200	745	955	3050 × 2150
1.6	17 / 1275	2000 × 1400	1100	620	830	2700 × 2000
1.6	21 / 1600	2100 × 1600	1100	670	880	2800 × 2100
1.6	24 / 1800	2350 × 1600	1200	745	955	3050 × 2100
1.6	26 / 2000	2350 × 1700	1200	745	955	3050 × 2150
2	17 / 1275	2000 × 1400	1100	620	830	2700 × 2000
2	21 / 1600	2100 × 1600	1100	670	880	2800 × 2100
2	24 / 1800	2350 × 1600	1200	745	955	3050 × 2100
2	26 / 2000	2350 × 1700	1200	745	955	3050 × 2150
2.5	13 / 1000	1600 × 1400	1100	550	700	2500 × 2000
2.5	15 / 1150	1600 × 1550	1100	550	700	2500 × 2100
2.5	17 / 1275	2000 × 1400	1100	620	830	2700 × 2000
2.5	21 / 1600	2100 × 1600	1100	670	880	2800 × 2100
2.5	24 / 1800	2350 × 1600	1200	745	955	3050 × 2100
2.5	26 / 2000	2350 × 1700	1200	745	955	3050 × 2150
3.0	13 / 1000	1600 × 1400	1100	625	625	2500 × 2200
3.0	15 / 1150	1600 × 1550	1100	625	625	2500 × 2200
3.0	17 / 1275	1600 × 1700	1100	625	625	2500 × 2200
3.0	18 / 1350	1600 × 1800	1100	625	625	2500 × 2200
3.0	21 / 1600	1600 × 2100	1100	625	625	2500 × 2400

Frame doors


Side opening

Speed (m/s)	Persons / rated load (kg)	BB × DD (mm)	LL (mm)	FW (mm)	FW1 (mm)	WW × WD (mm)
1	6 / 450	1000 × 1200	800	345	45	1550 × 1810
1	6 / 450	1000 × 1200	900	345	45	1650 × 1810
1	6 / 480	950 × 1300	800	295	45	1500 × 1910
1	6 / 480	950 × 1300	900	345	45	1650 × 1910
1	6 / 480	1000 × 1250	800	295	45	1500 × 1910
1	6 / 480	1000 × 1250	900	345	45	1650 × 1910
1	8 / 630	1100 × 1400	800	445	45	1650 × 2010
1	8 / 630	1100 × 1400	900	345	45	1650 × 2010
1	12 / 900	1400 × 1500	900	645	45	1950 × 2110
1	13 / 1000	1100 × 2100	800	445	45	1650 × 2500
1	13 / 1000	1100 × 2100	900	345	45	1650 × 2500
1	13 / 1000	1100 × 2100	1000	395	45	1800 × 2500
1	15 / 1150	1200 × 2100	800	445	45	1750 × 2500
1	15 / 1150	1200 × 2100	900	345	45	1750 × 2500
1	15 / 1150	1200 × 2100	1000	395	45	1800 × 2500
1.6	6 / 450	1000 × 1200	800	345	45	1550 × 1600
1.6	6 / 450	1000 × 1200	900	345	45	1625 × 1600
1.6	6 / 480	950 × 1300	800	295	45	1500 × 1700
1.6	6 / 480	950 × 1300	900	345	45	1625 × 1700
1.6	6 / 480	1000 × 1250	800	295	45	1500 × 1700
1.6	6 / 480	1000 × 1250	900	345	45	1625 × 1700
1.6	8 / 630	1100 × 1400	800	445	45	1650 × 1900
1.6	8 / 630	1100 × 1400	900	345	45	1650 × 1900
1.6	12 / 900	1400 × 1500	900	645	45	1950 × 1950
1.6	13 / 1000	1100 × 2100	800	445	45	1650 × 2500
1.6	13 / 1000	1100 × 2100	900	345	45	1650 × 2500
1.6	13 / 1000	1100 × 2100	1000	395	45	1800 × 2500
1.6	15 / 1150	1200 × 2100	800	445	45	1750 × 2500
1.6	15 / 1150	1200 × 2100	900	345	45	1750 × 2500
1.6	15 / 1150	1200 × 2100	1000	395	45	1800 × 2500
2	12 / 900	1400 × 1500	900	645	45	1950 × 1950
2	13 / 1000	1100 × 2100	800	45	445	1650 × 2500
2	13 / 1000	1100 × 2100	900	45	345	1650 × 2500
2	13 / 1000	1100 × 2100	1000	45	395	1800 × 2500
2	15 / 1150	1200 × 2100	800	445	45	1750 × 2500
2	15 / 1150	1200 × 2100	900	345	45	1750 × 2500
2	15 / 1150	1200 × 2100	1000	395	45	1800 × 2500



Center opening

Speed (m/s)	Persons / rated load (kg)	BB × DD (mm)	LL (mm)	FW (mm)	FW1 (mm)	WW × WD (mm)
1	8 / 630	1100 × 1400	800	320	320	1800 × 1700
1	8 / 630	1100 × 1400	900	370	370	2000 × 1700
1	10 / 800	1350 × 1400	800	370	370	1900 × 1800
1	10 / 800	1350 × 1400	900	370	370	2000 × 1800
1	12 / 900	1400 × 1500	800	395	395	1950 × 1850
1	12 / 900	1400 × 1500	900	370	370	2000 × 1850
1	13 / 1000	1100 × 2100	800	320	320	1800 × 2400
1	13 / 1000	1100 × 2100	900	370	370	2000 × 2400
1	13 / 1000	1100 × 2100	1000	420	420	2200 × 2400
1	13 / 1000	1600 × 1400	900	445	445	2150 × 1850
1	13 / 1000	1600 × 1400	1000	420	420	2200 × 1850
1	13 / 1000	1600 × 1400	1100	470	470	2400 × 1850
1	15 / 1150	1200 × 2100	800	320	320	1800 × 2400
1	15 / 1150	1200 × 2100	900	370	370	2000 × 2400
1	15 / 1150	1200 × 2100	1000	420	420	2200 × 2400
1	15 / 1150	1600 × 1550	900	445	445	2150 × 1850
1	15 / 1150	1600 × 1550	1000	420	420	2200 × 1850
1	15 / 1150	1600 × 1550	1100	470	470	2400 × 1850
1	17 / 1275	2000 × 1400	1100	725	515	2700 × 2000
1	21 / 1600	2100 × 1600	1100	775	565	2800 × 2100
1	24 / 1800	2350 × 1600	1200	850	640	3050 × 2100
1.6	8 / 630	1100 × 1400	800	295	295	1750 × 1800



Single entrance:

Speed (m/s)	Persons / rated load (kg)	BB × DD (mm)	LL (mm)	FW (mm)	FW1 (mm)	WW × WD (mm)
1.6	8 / 630	1100 × 1400	900	345	345	1950 × 1800
1.6	10 / 800	1350 × 1400	800	370	370	1900 × 1800
1.6	10 / 800	1350 × 1400	900	345	345	1950 × 1800
1.6	12 / 900	1400 × 1500	800	395	395	1950 × 1850
1.6	12 / 900	1400 × 1500	900	345	345	1950 × 1850
1.6	13 / 1000	1100 × 2100	800	295	295	1750 × 2400
1.6	13 / 1000	1100 × 2100	900	345	345	1950 × 2400
1.6	13 / 1000	1100 × 2100	1000	395	395	2150 × 2400
1.6	13 / 1000	1600 × 1400	900	445	445	2150 × 1850
1.6	13 / 1000	1600 × 1400	1000	395	395	2150 × 1850
1.6	13 / 1000	1600 × 1400	1100	445	445	2350 × 1850
1.6	15 / 1150	1200 × 2100	800	295	295	1750 × 2400
1.6	15 / 1150	1200 × 2100	900	345	345	1950 × 2400
1.6	15 / 1150	1200 × 2100	1000	395	395	2150 × 2400
1.6	15 / 1150	1600 × 1550	900	445	445	2150 × 1850
1.6	15 / 1150	1600 × 1550	1000	395	395	2150 × 1850
1.6	15 / 1150	1600 × 1550	1100	445	445	2350 × 1850
1.6	17 / 1275	2000 × 1400	1100	725	515	2700 × 2000
1.6	21 / 1600	2100 × 1600	1100	775	565	2800 × 2100
1.6	24 / 1800	2350 × 1600	1200	850	640	3050 × 2100
2	8 / 630	1100 × 1400	800	295	295	1750 × 1800
2	8 / 630	1100 × 1400	900	345	345	1950 × 1800
2	10 / 800	1350 × 1400	800	370	370	1900 × 1800
2	10 / 800	1350 × 1400	900	345	345	1950 × 1800
2	12 / 900	1400 × 1500	800	395	395	1950 × 1850
2	12 / 900	1400 × 1500	900	345	345	1950 × 1850
2	13 / 1000	1100 × 2100	800	295	295	1750 × 2400
2	13 / 1000	1100 × 2100	900	345	345	1950 × 2400
2	13 / 1000	1100 × 2100	1000	395	395	2150 × 2400
2	13 / 1000	1600 × 1400	900	445	445	2150 × 1850
2	13 / 1000	1600 × 1400	1000	395	395	2150 × 1850
2	13 / 1000	1600 × 1400	1100	445	445	2350 × 1850
2	15 / 1150	1200 × 2100	800	295	295	1750 × 2400
2	15 / 1150	1200 × 2100	900	345	345	1950 × 2400
2	15 / 1150	1200 × 2100	1000	395	395	2150 × 2400
2	15 / 1150	1600 × 1550	900	445	445	2150 × 1850
2	15 / 1150	1600 × 1550	1000	395	395	2150 × 1850
2	15 / 1150	1600 × 1550	1100	445	445	2350 × 1850
2	17 / 1275	2000 × 1400	1100	725	515	2700 × 2000
2	21 / 1600	2100 × 1600	1100	775	565	2800 × 2100
2	24 / 1800	2350 × 1600	1200	850	640	3050 × 2100
2.5	13 / 1000	1600 × 1400	1100	445	595	2500 × 2000
2.5	15 / 1150	1600 × 1550	1100	445	595	2500 × 2100
2.5	17 / 1275	2000 × 1400	1100	515	725	2700 × 2000
2.5	21 / 1600	2100 × 1600	1100	565	775	2800 × 2100
2.5	24 / 1800	2350 × 1600	1200	640	850	3050 × 2100
2.5	24 / 1800	2350 × 1600	1200	640	850	3050 × 2100
3.0	13 / 1000	1600 × 1400	1100	520	520	2500 × 2200
3.0	15 / 1150	1600 × 1550	1100	520	520	2500 × 2200
3.0	17 / 1275	1600 × 1700	1100	520	520	2500 × 2200
3.0	18 / 1350	1600 × 1800	1100	520	520	2500 × 2200
3.0	21 / 1600	1600 × 2100	1100	520	520	2500 × 2400


HORIZONTAL SHAFT DIMENSIONS

Dual entrance

Narrow frame doors


Side opening

Speed (m/s)	Persons/ rated load (kg)	BB × DD (mm)	LL (mm)	FW (mm)	FW1 (mm)	WW × WD (mm)
1,0 - 1,6	6 / 450	1000 × 1200	800	450	150	1550 × 1810
1,0 - 1,6	6 / 450	1000 × 1200	900	450	150	1650 × 1810
1,0 - 1,6	6 / 480	950 × 1300	800	400	150	1500 × 1910
1,0 - 1,6	6 / 480	950 × 1300	900	450	150	1650 × 1910
1,0 - 1,6	6 / 480	1000 × 1250	800	400	150	1500 × 1910
1,0 - 1,6	6 / 480	1000 × 1250	900	450	150	1650 × 1910
1	8 / 630	1100 × 1400	800	550	150	1650 × 2010
1	8 / 630	1100 × 1400	900	450	150	1650 × 2010
1	12 / 900	1400 × 1500	900	750	150	1950 × 2110
1	13 / 1000	1100 × 2100	800	550	150	1650 × 2710
1	13 / 1000	1100 × 2100	900	450	150	1650 × 2710
1	15 / 1150	1200 × 2100	800	150	550	1750 × 2710
1	15 / 1150	1200 × 2100	900	150	450	1750 × 2710
1	15 / 1150	1200 × 2100	1000	150	500	1800 × 2710
1.6	13 / 1000	1100 × 2100	800	550	150	1650 × 2710
1.6	13 / 1000	1100 × 2100	900	450	150	1650 × 2710
1.6	15 / 1150	1200 × 2100	800	150	550	1750 × 2710
1.6	15 / 1150	1200 × 2100	900	150	450	1750 × 2710
1.6	15 / 1150	1200 × 2100	1000	150	500	1800 × 2710
2	13 / 1000	1100 × 2100	800	150	550	1650 × 2710
2	13 / 1000	1100 × 2100	900	150	450	1650 × 2710
2	15 / 1150	1200 × 2100	800	150	550	1750 × 2710
2	15 / 1150	1200 × 2100	900	150	450	1750 × 2710
2	15 / 1150	1200 × 2100	1000	150	500	1800 × 2710

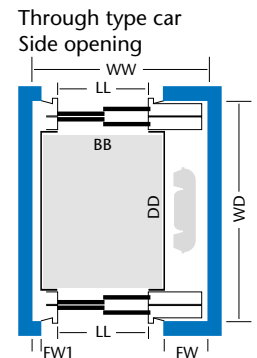

Center opening


Speed (m/s)	Persons / rated load (kg)	BB × DD (mm)	LL (mm)	FW (mm)	FW1 (mm)	WW × WD (mm)
1	8 / 630	1100 × 1400	800	425	425	1800 × 1810
1	8 / 630	1100 × 1400	900	475	475	2000 × 1810
1	12 / 900	1400 × 1500	800	500	500	1950 × 1910
1	12 / 900	1400 × 1500	900	450	450	1950 × 1910
1	13 / 1000	1100 × 2100	800	400	400	1750 × 2510
1	13 / 1000	1100 × 2100	900	450	450	1950 × 2510
1	13 / 1000	1100 × 2100	1000	500	500	2150 × 2510
1	15 / 1150	1200 × 2100	800	400	400	1750 × 2510
1	15 / 1150	1200 × 2100	900	450	450	1950 × 2510
1	15 / 1150	1200 × 2100	1000	500	500	2150 × 2510
1.6	13 / 1000	1100 × 2100	800	400	400	1750 × 2510
1.6	13 / 1000	1100 × 2100	900	450	450	1950 × 2510
1.6	13 / 1000	1100 × 2100	1000	500	500	2150 × 2510
1.6	15 / 1150	1200 × 2100	800	400	400	1750 × 2510
1.6	15 / 1150	1200 × 2100	900	450	450	1950 × 2510
1.6	15 / 1150	1200 × 2100	1000	500	500	2150 × 2510
2	13 / 1000	1100 × 2100	800	400	400	1750 × 2510
2	13 / 1000	1100 × 2100	900	450	450	1950 × 2510
2	15 / 1150	1200 × 2100	800	400	400	1750 × 2510
2	15 / 1150	1200 × 2100	900	450	450	1950 × 2510
2	15 / 1150	1200 × 2100	1000	500	500	2150 × 2510

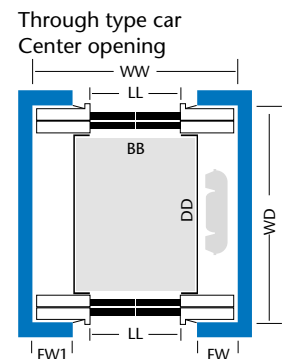

Frame doors


Side opening

Speed (m/s)	Persons / rated load (kg)	BB × DD (mm)	LL (mm)	FW (mm)	FW1 (mm)	WW × WD (mm)
1	8 / 630	1100 × 1400	800	445	45	1650 × 2010
1	8 / 630	1100 × 1400	900	345	45	1650 × 2010
1	12 / 900	1400 × 1500	900	645	45	1950 × 2110
1	13 / 1000	1100 × 2100	800	445	45	1650 × 2710
1	13 / 1000	1100 × 2100	900	345	45	1650 × 2710
1	15 / 1150	1200 × 2100	800	445	45	1750 × 2710
1	15 / 1150	1200 × 2100	900	345	45	1750 × 2710
1	15 / 1150	1200 × 2100	1000	395	45	1800 × 2710
1.6	13 / 1000	1100 × 2100	800	445	45	1650 × 2710
1.6	13 / 1000	1100 × 2100	900	345	45	1650 × 2710
1.6	15 / 1150	1200 × 2100	800	445	45	1750 × 2710
1.6	15 / 1150	1200 × 2100	900	345	45	1750 × 2710
1.6	15 / 1150	1200 × 2100	1000	395	45	1800 × 2710
2	13 / 1000	1100 × 2100	800	45	445	1650 × 2710
2	13 / 1000	1100 × 2100	900	45	345	1650 × 2710
2	15 / 1150	1200 × 2100	800	445	45	1750 × 2710
2	15 / 1150	1200 × 2100	900	345	45	1750 × 2710
2	15 / 1150	1200 × 2100	1000	395	45	1800 × 2710

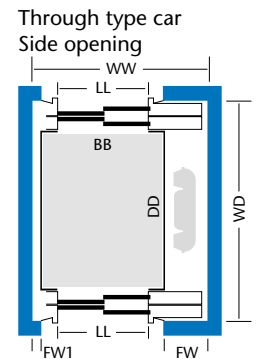

Center opening

Speed (m/s)	Persons / rated load (kg)	BB × DD (mm)	LL (mm)	FW (mm)	FW1 (mm)	WW × WD (mm)
1	8 / 630	1100 × 1400	800	425	425	1800 × 1810
1	8 / 630	1100 × 1400	900	475	475	2000 × 1810
1	12 / 900	1400 × 1500	800	500	500	1950 × 1910
1	12 / 900	1400 × 1500	900	450	450	1950 × 1910
1	13 / 1000	1100 × 2100	800	400	400	1750 × 2510
1	13 / 1000	1100 × 2100	900	450	450	1950 × 2510
1	13 / 1000	1100 × 2100	1000	500	500	2150 × 2510
1	15 / 1150	1200 × 2100	800	400	400	1750 × 2510
1	15 / 1150	1200 × 2100	900	450	450	1950 × 2510
1	15 / 1150	1200 × 2100	1000	500	500	2150 × 2510
1.6	13 / 1000	1100 × 2100	800	400	400	1750 × 2510
1.6	13 / 1000	1100 × 2100	900	450	450	1950 × 2510
1.6	13 / 1000	1100 × 2100	1000	500	500	2150 × 2510
1.6	15 / 1150	1200 × 2100	800	400	400	1750 × 2510
1.6	15 / 1150	1200 × 2100	900	450	450	1950 × 2510
1.6	15 / 1150	1200 × 2100	1000	500	500	2150 × 2510
2	13 / 1000	1100 × 2100	800	400	400	1750 × 2510
2	13 / 1000	1100 × 2100	900	450	450	1950 × 2510
2	15 / 1150	1200 × 2100	800	400	400	1750 × 2510
2	15 / 1150	1200 × 2100	900	450	450	1950 × 2510
2	15 / 1150	1200 × 2100	1000	500	500	2150 × 2510

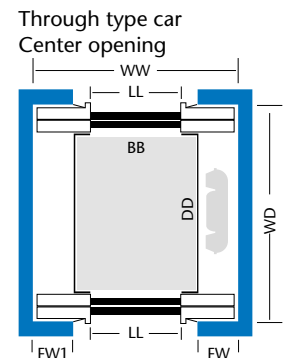



KONE provides innovative and eco-efficient solutions for elevators, escalators and automatic building doors. We support our customers every step of the way; from design, manufacturing and installation to maintenance and modernization. KONE is a global leader in helping our customers manage the smooth flow of people and goods throughout their buildings.

Our commitment to customers is present in all KONE solutions. This makes us a reliable partner throughout the life-cycle of the building. We challenge the conventional wisdom of the industry. We are fast, flexible, and we have a well-deserved reputation as a technology leader, with such innovations as KONE MonoSpace® KONE MaxiSpace™, and KONE InnoTrack™. You can experience these innovations in architectural landmarks such as the Trump Tower in Chicago, the 30 St Mary Axe building in London, the Schiphol Airport in Amsterdam and the Beijing National Grand Theatre in China.

KONE employs approximately 34,000 dedicated experts to serve you globally and locally in over 50 countries.

KONE Corporation
www.kone.com

This publication is for general informational purposes only and we reserve the right at any time to alter the product design and specifications. No statement contained in this publication shall be construed as a warranty or condition, express or implied, as to any product, its fitness for any particular purpose, merchantability, quality or shall be interpreted as a term or condition of any purchase agreement for the products or services contained in this publication. Minor differences between printed and actual colors may exist. KONE®, Dedicated to People Flow™, KONE MonoSpace®, KONE MiniSpace™ KONE EcoDisc®, KONE Alta™, KONE MaxiSpace™, KONE InnoTrack™, KONE EcoMaster™, KONE MovingMedia™, are trademarks or registered trademarks of KONE Corporation. Copyright © 2010 KONE Corporation.