


The heart of your building™

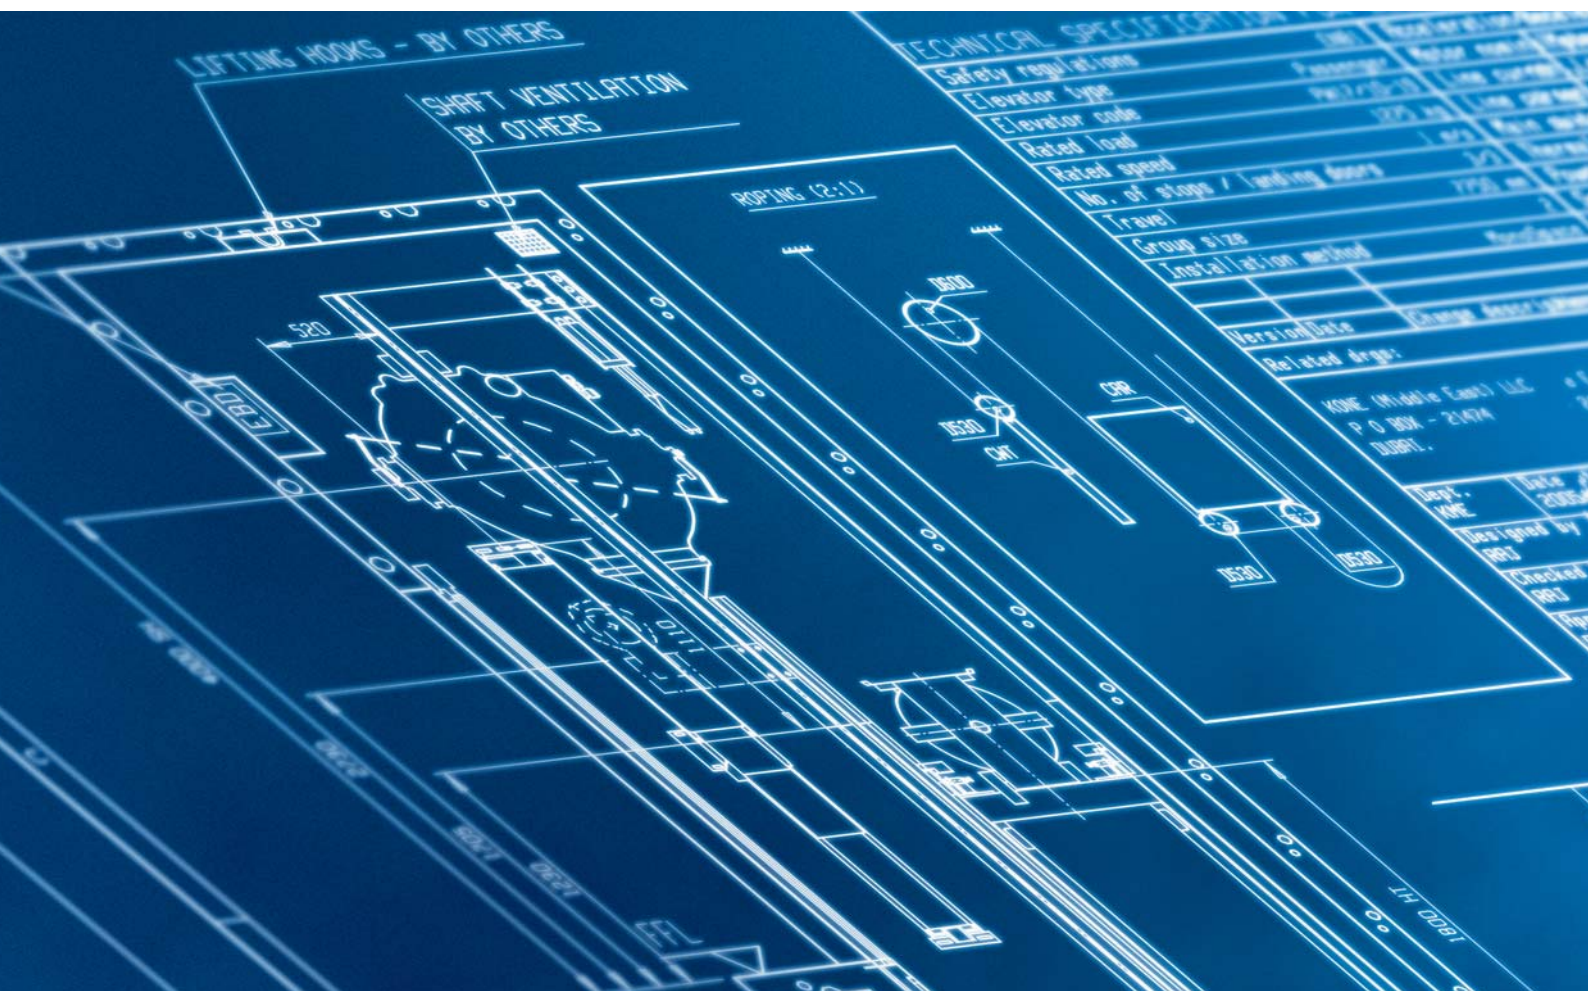

# Planning Guide

KONE MINISPACE™



# KONE MiniSpace™ planning dimensions

## The cars

KONE 3000 MiniSpace – Car and Well dimensions, Maximum travel 120 m						
Persons/ load (kg)	Rated speed (m/s)	Car size BB x DD (mm)	Car type	LL (mm)	Door type	Well size WW x WD (mm)
08/630	1.0	1400 x 1100	SEC	800	CO	1800 x 1700
	1.6, 1.75, 2.0	1400 x 1100	SEC	800	CO	1850 x 1700
	2.5	1400 x 1100	SEC	800	CO	1900 x 1750
10/800	1.0, 1.6, 1.75, 2.0	1350 x 1400	SEC	800	CO	1850 x 2000
	1.0, 1.6, 1.75, 2.0	1350 x 1400	SEC	900	CO	1950 x 2000
	2.5	1350 x 1400	SEC	800	CO	1900 x 2050
	2.5	1350 x 1400	SEC	900	CO	2000 x 2050
12/900	1.0	1600 x 1350	SEC	900	CO	2000 x 1950
	1.6, 1.75, 2.0	1600 x 1350	SEC	900	CO	2050 x 1950
	2.5	1600 x 1350	SEC	900	CO	2100 x 2000
13/1000	1.0, 1.6, 1.75, 2.0	1600 x 1400	SEC	900	CO	2050 x 2000
	1.0, 1.6, 1.75, 2.0	1600 x 1400	SEC	1000	CO	2150 x 2000
	2.5	1600 x 1400	SEC	900	CO	2100 x 2050
	2.5	1600 x 1400	SEC	1000	CO	2150 x 2050
	1.0, 1.6, 1.75, 2.0, 2.5	1100 x 2100	SEC	900	CO	2000 x 2450 *)
	1.0, 1.6, 1.75, 2.0, 2.5	1100 x 2100	TTC	900	CO	2000 x 2590 *)
15/1150	1.0, 1.6, 1.75, 2.0, 2.5	1800 x 1450	SEC	900, 1000	CO	2300 x 2100
	1.0, 1.6, 1.75, 2.0, 2.5	1800 x 1450	SEC	1100	CO	2400 x 2100
17/1275	1.0, 1.6, 1.75, 2.0, 2.5	1200 x 2300	SEC	1100	CO	2400 x 2650 *)
	1.0, 1.6, 1.75, 2.0, 2.5	1200 x 2300	TTC	1100	CO	2400 x 2790 *)
18/1350	1.0, 1.6, 1.75, 2.0, 2.5	2000 x 1500	SEC	900, 1000, 1100	CO	2500 x 2150
21/1600	1.0, 1.6, 1.75, 2.0, 2.5	2100 x 1600	SEC	900, 1000, 1100	CO	2700 x 2250
	1.0, 1.6, 1.75, 2.0, 2.5	1400 x 2400	SEC	1300	SO	2350 x 2850 *)
	1.0, 1.6, 1.75, 2.0, 2.5	1400 x 2400	TTC	1300	SO	2350 x 3090 *)

\*) Suitable for stretcher car

KONE 3000S MiniSpace – Car and Well dimensions, Maximum travel 100 m						
Persons/ load (kg)	Rated speed (m/s)	Car size BB x DD (mm)	Car type	LL (mm)	Door type	Well size WW x WD (mm)
08/630	≤ 2.0	1100 x 1400	SEC	800	CO	1750 x 1850
10/800	≤ 2.0	1100 x 1650	SEC	800	CO	1750 x 2100
	≤ 1.75	1350 x 1400	SEC	800, 900	CO	1950 x 1900
13/1000	2.0	1350 x 1400	SEC	800, 900	CO	2000 x 1950
	≤ 1.75	1250 x 1400	SEC	800	CO	1850 x 1950
	2.0	1250 x 1400	SEC	800	CO	1900 x 1950
	≤ 1.75	1600 x 1400	SEC	900	CO	2200 x 1950
15/1150	≤ 1.75	1600 x 1400	SEC	1000	CO	2250 x 1950
	2.0	1600 x 1400	SEC	900, 1000	CO	2300 x 1950
	≤ 1.75	1400 x 1600	SEC	900	CO	2000 x 2000
	≤ 1.75	1400 x 1600	TTC	900	CO	2000 x 2090
	2.0	1400 x 1600	SEC	900	CO	2050 x 2000
	2.0	1400 x 1600	TTC	900	CO	2050 x 2090
	≤ 2.0	1100 x 2100	SEC	900	CO	1950 x 2450
	≤ 2.0	1100 x 2100	TTC	900	CO	1950 x 2590
	≤ 1.75	1550 x 1450	SEC	900	CO	2100 x 1950
	2.0	1550 x 1450	SEC	900	CO	2200 x 1950
15/1150	≤ 2.0	1800 x 1450	SEC	1000, 1100	CO	2500 x 1950
	≤ 2.0	1600 x 1550	SEC	900	CO	2250 x 1950





# The shaft

**KONE 3000 MiniSpace – Headroom and Pit dimensions**

Persons/ load (kg)	Car interior height CH (mm)	Door height (mm)	Pit depth PH (mm)		Overhead SH (mm)		Pit depth PH (mm)		Overhead SH (mm)		Pit depth PH (mm)		Overhead SH (mm)	
			1.0 m/s	1.0 m/s	1.6 m/s	1.6 m/s	1.75 m/s	1.75 m/s	2.0 m/s	2.0 m/s	2.5 m/s	2.5 m/s		
08/630	2280	2100	1300	3900	1350	4000	1500	4100	1650	4200	2100	4400		
	2400	2100	1300	4000	1350	4100	1500	4150	1650	4250	2100	4500		
10/800	2280	2100	1300	3900	1350	4000	1500	4100	1650	4200	2100	4400		
	2400	2100	1300	4000	1350	4100	1500	4150	1650	4250	2100	4500		
	2500, 2600, 2700	2100, 2200, 2300, 2400	1300	4300	1350	4400	1500	4450	1650	4550	2100	4800		
12/900	2280	2100	1300	3900	1350	4000	1500	4100	1650	4200	2100	4400		
	2400	2100	1300	4000	1350	4100	1500	4150	1650	4250	2100	4500		
	2500, 2600, 2700	2100, 2200, 2300, 2400	1300	4300	1350	4400	1500	4450	1650	4550	2100	4800		
13/1000	2280	2100	1300	3900	1350	4000	1500	4100	1650	4200	2100	4400		
	2400	2100	1300	4000	1350	4100	1500	4150	1650	4250	2100	4500		
	2500, 2600, 2700	2100, 2200, 2300, 2400	1300	4300	1350	4400	1500	4450	1650	4550	2100	4800		
15/1150	2400	2100	1350	4100	1450	4250	1600	4300	1700	4400	2200	4600		
	2500, 2600, 2700	2100, 2200, 2300, 2400	1350	4300	1450	4450	1600	4500	1700	4600	2200	4800		
18/1350	2400	2100	1350	4100	1450	4250	1600	4300	1700	4400	2200	4600		
	2500, 2600, 2700	2100, 2200, 2300, 2400	1350	4300	1450	4450	1600	4500	1700	4600	2200	4800		
17/1275	2280, 2400	2100	1350	4100	1450	4250	1600	4300	1700	4400	2200	4600		
21/1600	2280, 2400	2100	1350	4100	1450	4250	1600	4300	1700	4400	2200	4600		
	2500, 2600, 2700	2100, 2200, 2300, 2400	1350	4300	1450	4450	1600	4500	1700	4600	2200	4800		

**KONE 3000S MiniSpace – Headroom and Pit dimensions**

Persons/ load (kg)	Car interior height CH (mm)	Door height (mm)	Pit depth PH (mm)		Overhead SH (mm)		Pit depth PH (mm)		Overhead SH (mm)		Pit depth PH (mm)		Overhead SH (mm)	
			1.0 m/s	1.0 m/s	1.6 m/s	1.6 m/s	1.75 m/s	1.75 m/s	2.0 m/s	2.0 m/s	2.5 m/s	2.5 m/s		
08/630	2280	2100	1400	3800	1450	3850	1550	3900	1650	4050				
10/800	2280	2100	1400	3800	1450	3850	1550	3900	1650	4050				
13/1000	2280	2100	1400	3900	1450	3950	1550	4000	1650	4150				
	2400	2100	1400	3900	1450	3950	1550	4000	1650	4150				
15/1150	2280	2100	1450	3800	1450	3850	1550	3950	1700	4050				
	2400	2100	1450	3900	1450	3950	1550	4050	1700	4150				

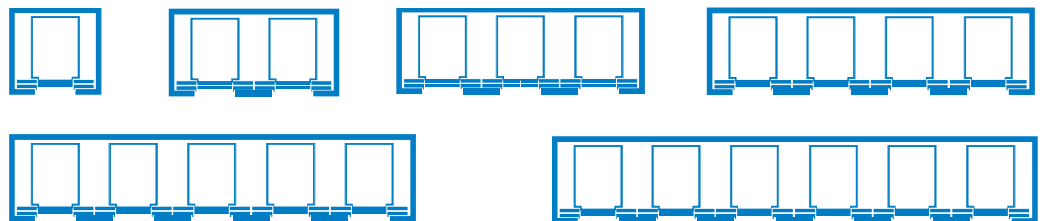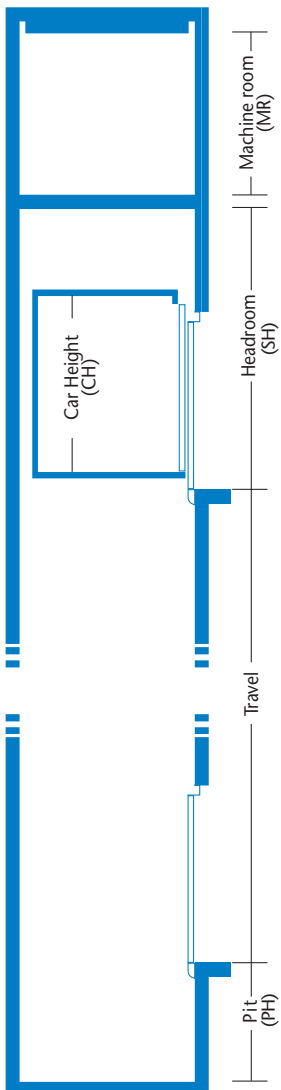



[www.kone.com](http://www.kone.com)