


*Dedicated to People Flow™*

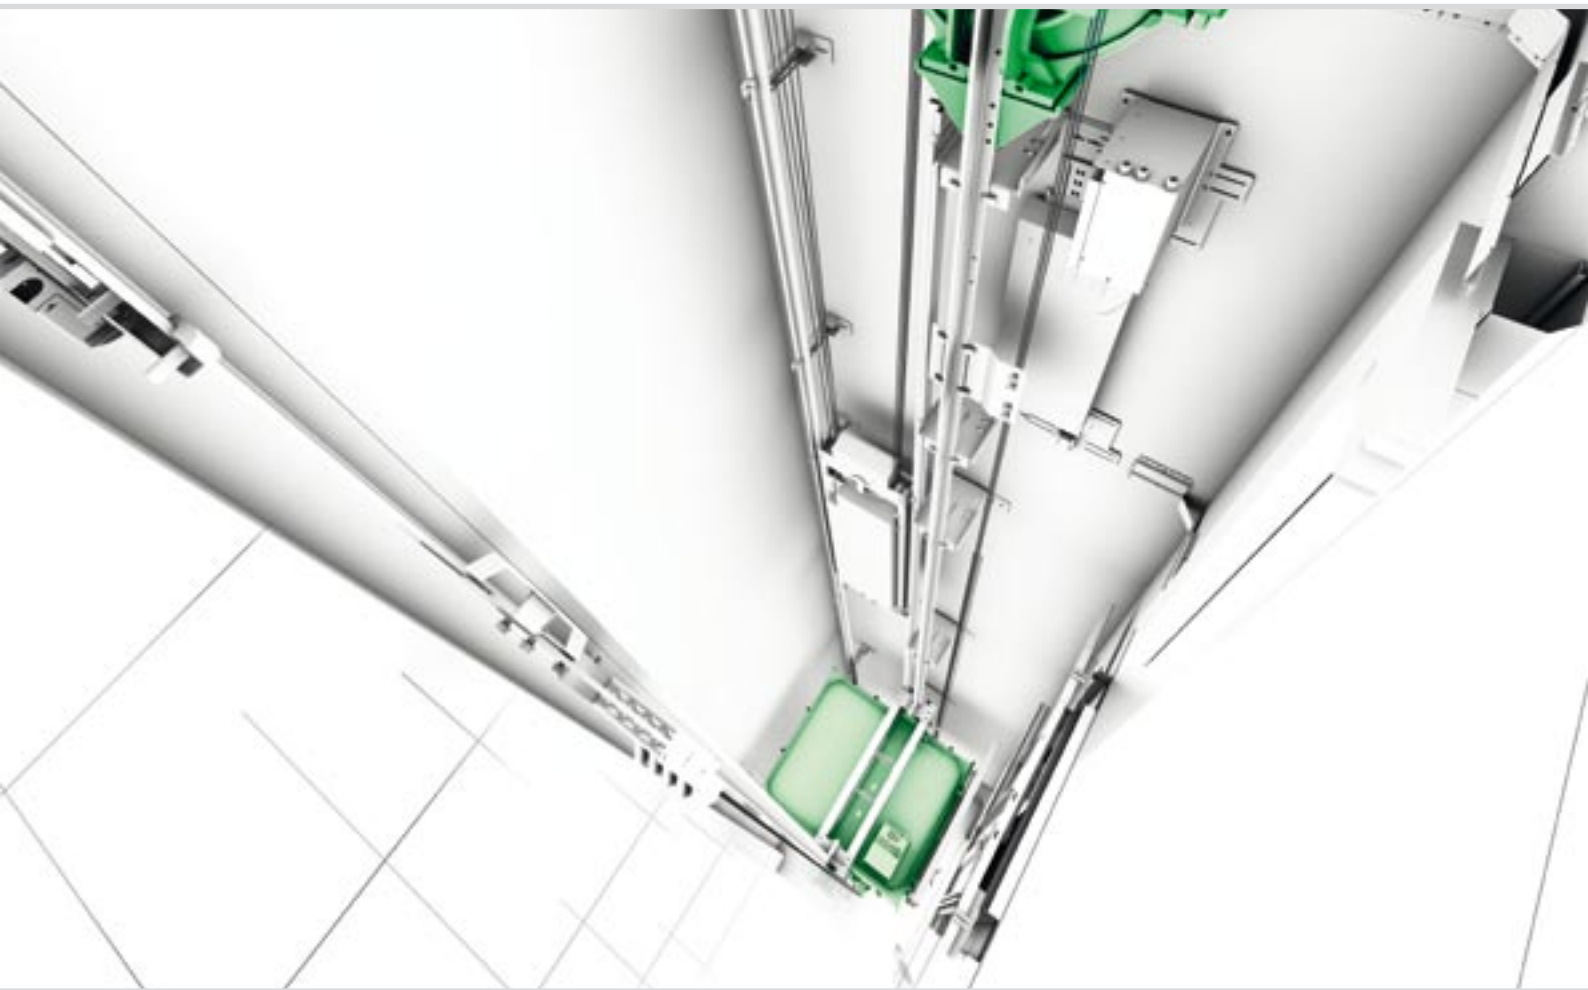

PLANNING DATA 1.0-2.5m/s; 450-2000kg

# KONE


# MonoSpace® Special

## VERTICAL SHAFT DIMENSIONS

### Single entrance:

Rated load [kg]	Speed [m/s]	Headroom height (SH) [mm]	Pit height (PH) [mm]
320 – 630	1	CH + 1400 (3500)	1240
630 – 1150	1.6	CH + 1600 (3750)	1550
630 – 1150	2	CH + 1800 (4100)	1600
800 – 1000	1	CH + 1400 (3500)	1280
800 – 1150 (1)	1	CH + 1450 (3750)	1350
1275 – 2500	1	CH + 1400 (3850)	1600
1275 – 1600	1.6	CH + 1600 (3850)	1700
1275 – 1600	2	CH + 2000 (4200)	2000
1275 – 1800	2.5	CH + 2300 (4500)	2400
1800	1.6	CH + 1600 (3850)	1800
1800	2	CH + 2000 (4200)	2050
2000	1.6	CH + 1600 (3850)	1900
2000	2	CH + 2000 (4200)	2150
2000	2.5	CH + 2300 (4500)	2500
2275	1.6	CH + 1600 (3850)	1850

CH = Car height

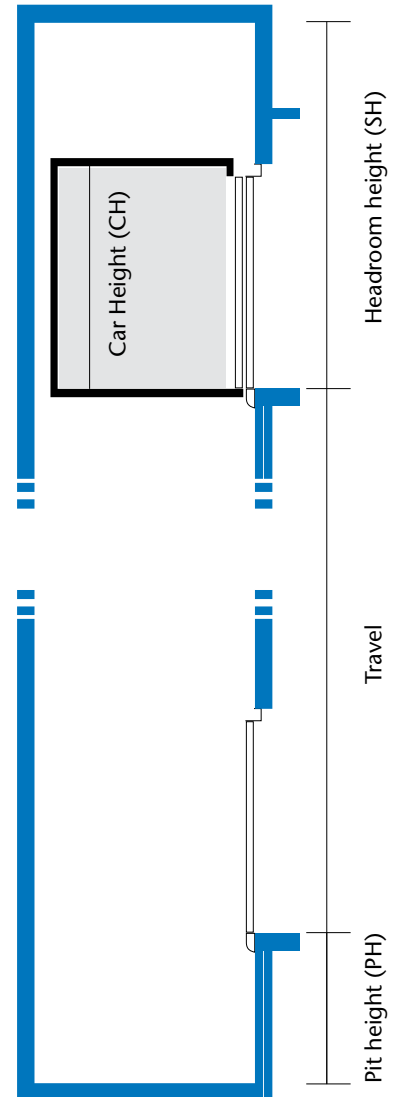

## VERTICAL SHAFT DIMENSIONS

### Dual entrance:

Rated load [kg]	Speed [m/s]	Headroom height (SH) [mm]	Pit height (PH) [mm]
320 – 630	1	CH + 1400 (3500)	1240
630 – 1150	1.6	CH + 1600 (3750)	1550
630 – 1150	2	CH + 1800 (4100)	1600
800 – 1000	1	CH + 1400 (3500)	1280
800 – 1150 (1)	1	CH + 1450 (3750)	1350
1275 – 2500	1	CH + 1400 (3850)	1600
1275 – 1600	1.6	CH + 1600 (3850)	1700
1275 – 1600	2	CH + 2000 (4200)	2000
1275 – 1800	2.5	CH + 2300 (4500)	2400
1800	1.6	CH + 1600 (3850)	1800
1800	2	CH + 2000 (4200)	2050
2000	1.6	CH + 1600 (3850)	1900
2000	2	CH + 2000 (4200)	2150
2000	2.5	CH + 2300 (4500)	2500
2275	1.6	CH + 1600 (3850)	1850


HORIZONTAL SHAFT DIMENSIONS

# Single entrance

# Narrow frame doors


## Side opening

Speed (m/s)	Persons / rated load (kg)	BB × DD (mm)	LL (mm)	FW1 (mm)	FW (mm)	WW × WD (mm)
1	6 / 450	1000 × 1200	800	150	450	1550 × 1600
1	6 / 450	1000 × 1200	900	150	450	1650 × 1600
1	6 / 480	950 × 1300	800	150	400	1500 × 1700
1	6 / 480	950 × 1300	900	150	450	1650 × 1700
1	6 / 480	1000 × 1250	800	150	450	1550 × 1650
1	6 / 480	1000 × 1250	900	150	450	1650 × 1650
1	8 / 630	1100 × 1400	800	150	550	1650 × 1800
1	8 / 630	1100 × 1400	900	150	450	1650 × 1800
1	12 / 900	1400 × 1500	900	150	750	1950 × 1900
1	13 / 1000	1100 × 2100	800	150	550	1650 × 2500
1	13 / 1000	1100 × 2100	900	150	450	1650 × 2500
1	13 / 1000	1100 × 2100	1000	150	500	1800 × 2500
1	15 / 1150	1200 × 2100	800	550	150	1750 × 2500
1	15 / 1150	1200 × 2100	900	450	150	1750 × 2500
1	15 / 1150	1200 × 2100	1000	500	150	1800 × 2500
1	17 / 1275	1200 × 2300	1100	575	175	2000 × 2700
1	21 / 1600	1400 × 2400	1300	650	200	2300 × 2800
1	26 / 2000	1500 × 2700	1300	675	175	2300 × 3100
1.6	6 / 450	1000 × 1200	800	150	450	1550 × 1600
1.6	6 / 450	1000 × 1200	900	150	450	1650 × 1600
1.6	6 / 480	950 × 1300	800	150	400	1500 × 1700
1.6	6 / 480	950 × 1300	900	150	450	1650 × 1700
1.6	6 / 480	1000 × 1250	800	150	450	1550 × 1650
1.6	6 / 480	1000 × 1250	900	150	450	1650 × 1650
1.6	8 / 630	1100 × 1400	800	150	550	1650 × 1900
1.6	8 / 630	1100 × 1400	900	150	450	1650 × 1900
1.6	12 / 900	1400 × 1500	900	150	750	1950 × 1950
1.6	13 / 1000	1100 × 2100	800	150	550	1650 × 2500
1.6	13 / 1000	1100 × 2100	900	150	450	1650 × 2500
1.6	13 / 1000	1100 × 2100	1000	150	500	1800 × 2500
1.6	15 / 1150	1200 × 2100	800	550	150	1750 × 2500
1.6	15 / 1150	1200 × 2100	900	450	150	1750 × 2500
1.6	15 / 1150	1200 × 2100	1000	500	150	1800 × 2500
1.6	17 / 1275	1200 × 2300	1100	575	175	2000 × 2700
1.6	21 / 1600	1400 × 2400	1300	650	200	2300 × 2800
1.6	26 / 2000	1500 × 2700	1300	675	175	2300 × 3100
2	8 / 630	1100 × 1400	800	550	150	1650 × 1900
2	8 / 630	1100 × 1400	900	450	150	1650 × 1900
2	12 / 900	1400 × 1500	900	150	750	1950 × 1950
2	13 / 1000	1100 × 2100	800	550	150	1650 × 2500
2	13 / 1000	1100 × 2100	900	450	150	1650 × 2500
2	13 / 1000	1100 × 2100	1000	500	150	1800 × 2500
2	15 / 1150	1200 × 2100	800	550	150	1750 × 2500
2	15 / 1150	1200 × 2100	900	450	150	1750 × 2500
2	15 / 1150	1200 × 2100	1000	500	150	1800 × 2500
2	17 / 1275	1200 × 2300	1100	575	175	2000 × 2700
2	21 / 1600	1400 × 2400	1300	650	200	2300 × 2800
2	26 / 2000	1500 × 2700	1300	675	175	2300 × 3100

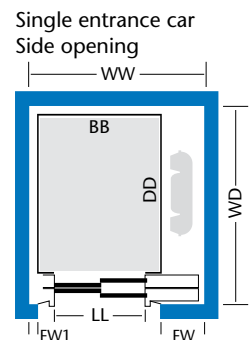

## Center opening

Speed (m/s)	Persons / rated load (kg)	BB × DD (mm)	LL (mm)	FW1 (mm)	FW (mm)	WW × WD (mm)
1	8 / 630	1100 × 1400	800	425	425	1800 × 1700
1	8 / 630	1100 × 1400	900	475	475	2000 × 1700
1	10 / 800	1350 × 1400	800	475	475	1900 × 1800
1	10 / 800	1350 × 1400	900	450	450	1950 × 1800
1	12 / 900	1400 × 1500	800	500	500	1950 × 1850
1	12 / 900	1400 × 1500	900	450	450	1950 × 1850
1	13 / 1000	1100 × 2100	800	400	400	1750 × 2400
1	13 / 1000	1100 × 2100	900	450	450	1950 × 2400
1	13 / 1000	1100 × 2100	1000	500	500	2150 × 2400
1	13 / 1000	1600 × 1400	900	550	550	2150 × 1850
1	13 / 1000	1600 × 1400	1000	500	500	2150 × 1850
1	13 / 1000	1600 × 1400	1100	550	550	2350 × 1850
1	15 / 1150	1200 × 2100	800	400	400	1750 × 2400
1	15 / 1150	1200 × 2100	900	450	450	1950 × 2400




1	15 / 1150	1200 × 2100	1000	500	500	2150 × 2400
1	15 / 1150	1600 × 1550	900	550	550	2150 × 1850
1	15 / 1150	1600 × 1550	1000	500	500	2150 × 1850
1	15 / 1150	1600 × 1550	1100	550	550	2350 × 1850
1	17 / 1275	2000 × 1400	1100	830	620	2700 × 2000
1	21 / 1600	2100 × 1600	1100	880	670	2800 × 2100
1	24 / 1800	2350 × 1600	1200	955	745	3050 × 2100
1	26 / 2000	2350 × 1700	1200	955	745	3050 × 2150
1.6	8 / 630	1100 × 1400	800	400	400	1750 × 1800
1.6	8 / 630	1100 × 1400	900	450	450	1950 × 1800
1.6	10 / 800	1350 × 1400	800	475	475	1900 × 1800
1.6	10 / 800	1350 × 1400	900	450	450	1950 × 1800
1.6	12 / 900	1400 × 1500	800	500	500	1950 × 1850
1.6	12 / 900	1400 × 1500	900	450	450	1950 × 1850
1.6	13 / 1000	1100 × 2100	800	400	400	1750 × 2400
1.6	13 / 1000	1100 × 2100	900	450	450	1950 × 2400
1.6	13 / 1000	1100 × 2100	1000	500	500	2150 × 2400
1.6	13 / 1000	1600 × 1400	900	550	550	2150 × 1850
1.6	13 / 1000	1600 × 1400	1000	500	500	2150 × 1850
1.6	13 / 1000	1600 × 1400	1100	550	550	2350 × 1850
1.6	15 / 1150	1200 × 2100	800	400	400	1750 × 2400
1.6	15 / 1150	1200 × 2100	900	450	450	1950 × 2400
1.6	15 / 1150	1200 × 2100	1000	500	500	2150 × 2400
1.6	15 / 1150	1600 × 1550	900	550	550	2150 × 1850
1.6	15 / 1150	1600 × 1550	1000	500	500	2150 × 1850
1.6	15 / 1150	1600 × 1550	1100	550	550	2350 × 1850
1.6	17 / 1275	2000 × 1400	1100	830	620	2700 × 2000
1.6	21 / 1600	2100 × 1600	1100	880	670	2800 × 2100
1.6	24 / 1800	2350 × 1600	1200	955	745	3050 × 2100
1.6	26 / 2000	2350 × 1700	1200	955	745	3050 × 2150
2	8 / 630	1100 × 1400	800	400	400	1750 × 1800
2	8 / 630	1100 × 1400	900	450	450	1950 × 1800
2	10 / 800	1350 × 1400	800	475	475	1900 × 1800
2	10 / 800	1350 × 1400	900	450	450	1950 × 1800
2	12 / 900	1400 × 1500	800	500	500	1950 × 1850
2	12 / 900	1400 × 1500	900	450	450	1950 × 1850
2	13 / 1000	1100 × 2100	800	400	400	1750 × 2400
2	13 / 1000	1100 × 2100	900	450	450	1950 × 2400
2	13 / 1000	1100 × 2100	1000	500	500	2150 × 2400
2	13 / 1000	1600 × 1400	900	550	550	2150 × 1850
2	13 / 1000	1600 × 1400	1000	500	500	2150 × 1850
2	13 / 1000	1600 × 1400	1100	550	550	2350 × 1850
2	15 / 1150	1200 × 2100	800	400	400	1750 × 2400
2	15 / 1150	1200 × 2100	900	450	450	1950 × 2400
2	15 / 1150	1200 × 2100	1000	500	500	2150 × 2400
2	15 / 1150	1600 × 1550	900	550	550	2150 × 1850
2	15 / 1150	1600 × 1550	1000	500	500	2150 × 1850
2	15 / 1150	1600 × 1550	1100	550	550	2350 × 1850
2	17 / 1275	2000 × 1400	1100	830	620	2700 × 2000
2	21 / 1600	2100 × 1600	1100	880	670	2800 × 2100
2	24 / 1800	2350 × 1600	1200	955	745	3050 × 2100
2	26 / 2000	2350 × 1700	1200	955	745	3050 × 2150
2.5	17 / 1275	2000 × 1400	1100	830	620	2700 × 2000
2.5	21 / 1600	2100 × 1600	1100	880	670	2800 × 2100
2.5	24 / 1800	2350 × 1600	1200	955	745	3050 × 2100
2.5	26 / 2000	2350 × 1700	1200	955	745	3050 × 2150

# Frame doors


## Side opening

Speed (m/s)	Persons / rated load (kg)	BB × DD (mm)	LL (mm)	FW1 (mm)	FW (mm)	WW × WD (mm)
1	6 / 450	1000 × 1200	800	45	345	1550 × 1600
1	6 / 450	1000 × 1200	900	45	345	1650 × 1600
1	6 / 480	950 × 1300	800	45	295	1500 × 1700
1	6 / 480	950 × 1300	900	45	345	1650 × 1700
1	6 / 480	1000 × 1250	800	45	345	1550 × 1650
1	6 / 480	1000 × 1250	900	45	345	1650 × 1650
1	8 / 630	1100 × 1400	800	45	445	1650 × 1800
1	8 / 630	1100 × 1400	900	45	345	1650 × 1800
1	12 / 900	1400 × 1500	900	45	645	1950 × 1950
1	13 / 1000	1100 × 2100	800	45	445	1650 × 2500
1	13 / 1000	1100 × 2100	900	45	345	1650 × 2500
1	13 / 1000	1100 × 2100	1000	45	395	1800 × 2500
1	15 / 1150	1200 × 2100	800	45	445	1750 × 2500
1	15 / 1150	1200 × 2100	900	45	345	1750 × 2500
1	15 / 1150	1200 × 2100	1000	45	395	1800 × 2500
1.6	6 / 450	1000 × 1200	800	45	345	1550 × 1600
1.6	6 / 450	1000 × 1200	900	45	345	1650 × 1600
1.6	6 / 480	950 × 1300	800	45	295	1500 × 1700
1.6	6 / 480	950 × 1300	900	45	345	1650 × 1700
1.6	6 / 480	1000 × 1250	800	45	345	1550 × 1650
1.6	6 / 480	1000 × 1250	900	45	345	1650 × 1650
1.6	8 / 630	1100 × 1400	800	45	445	1650 × 1900
1.6	8 / 630	1100 × 1400	900	45	345	1650 × 1900
1.6	12 / 900	1400 × 1500	900	45	645	1950 × 1950
1.6	13 / 1000	1100 × 2100	800	45	445	1650 × 2500
1.6	13 / 1000	1100 × 2100	900	45	345	1650 × 2500
1.6	13 / 1000	1100 × 2100	1000	45	395	1800 × 2500
1.6	15 / 1150	1200 × 2100	800	45	445	1750 × 2500
1.6	15 / 1150	1200 × 2100	900	45	345	1750 × 2500
1.6	15 / 1150	1200 × 2100	1000	45	395	1800 × 2500
1.6	8 / 630	1100 × 1400	800	445	45	1625 × 1900
1.6	8 / 630	1100 × 1400	900	345	45	1625 × 1900
2	12 / 900	1400 × 1500	900	45	645	1950 × 1950
2	13 / 1000	1100 × 2100	800	445	45	1650 × 2500
2	13 / 1000	1100 × 2100	900	345	45	1650 × 2500
2	13 / 1000	1100 × 2100	1000	395	45	1800 × 2500
2	15 / 1150	1200 × 2100	800	45	445	1750 × 2500
2	15 / 1150	1200 × 2100	900	45	345	1750 × 2500
2	15 / 1150	1200 × 2100	1000	45	395	1800 × 2500

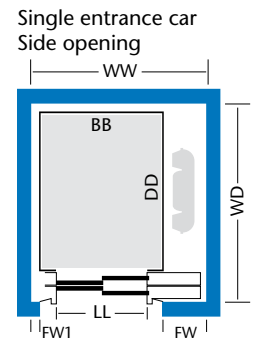

## Center opening

Speed (m/s)	Persons / rated load (kg)	BB × DD (mm)	LL (mm)	FW1 (mm)	FW (mm)	WW × WD (mm)
1	8 / 630	1100 × 1400	800	320	320	1800 × 1700
1	8 / 630	1100 × 1400	900	370	370	2000 × 1700
1	10 / 800	1350 × 1400	800	370	370	1900 × 1800
1	10 / 800	1350 × 1400	900	370	370	2000 × 1800
1	12 / 900	1400 × 1500	800	395	395	1950 × 1850
1	12 / 900	1400 × 1500	900	370	370	2000 × 1850
1	13 / 1000	1100 × 2100	800	320	320	1800 × 2400
1	13 / 1000	1100 × 2100	900	370	370	2000 × 2400
1	13 / 1000	1100 × 2100	1000	420	420	2200 × 2400
1	13 / 1000	1600 × 1400	900	445	445	2150 × 1850
1	13 / 1000	1600 × 1400	1000	420	420	2200 × 1850
1	13 / 1000	1600 × 1400	1100	470	470	2400 × 1850
1	15 / 1150	1200 × 2100	800	320	320	1800 × 2400
1	15 / 1150	1200 × 2100	900	370	370	2000 × 2400
1	15 / 1150	1200 × 2100	1000	420	420	2200 × 2400
1	15 / 1150	1600 × 1550	900	445	445	2150 × 1850
1	15 / 1150	1600 × 1550	1000	420	420	2200 × 1850
1	15 / 1150	1600 × 1550	1100	470	470	2400 × 1850
1	17 / 1275	2000 × 1400	1100	515	725	2700 × 2000
1	21 / 1600	2100 × 1600	1100	565	775	2800 × 2100
1	24 / 1800	2350 × 1600	1200	640	850	3050 × 2100
1.6	8 / 630	1100 × 1400	800	295	295	1750 × 1800
1.6	8 / 630	1100 × 1400	900	345	345	1950 × 1800

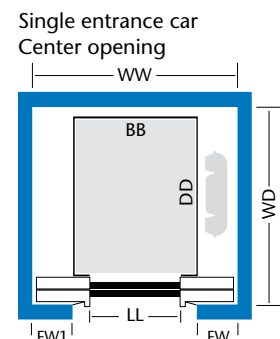

1.6	10 / 800	1350 × 1400	800	370	370	1900 × 1800
1.6	10 / 800	1350 × 1400	900	345	345	1950 × 1800
1.6	12 / 900	1400 × 1500	800	395	395	1950 × 1850
1.6	12 / 900	1400 × 1500	900	345	345	1950 × 1850
1.6	13 / 1000	1100 × 2100	800	295	295	1750 × 2400
1.6	13 / 1000	1100 × 2100	900	345	345	1950 × 2400
1.6	13 / 1000	1100 × 2100	1000	395	395	2150 × 2400
1.6	13 / 1000	1600 × 1400	900	445	445	2150 × 1850
1.6	13 / 1000	1600 × 1400	1000	395	395	2150 × 1850
1.6	13 / 1000	1600 × 1400	1100	445	445	2350 × 1850
1.6	15 / 1150	1200 × 2100	800	295	295	1750 × 2400
1.6	15 / 1150	1200 × 2100	900	345	345	1950 × 2400
1.6	15 / 1150	1200 × 2100	1000	395	395	2150 × 2400
1.6	15 / 1150	1600 × 1550	900	445	445	2150 × 1850
1.6	15 / 1150	1600 × 1550	1000	395	395	2150 × 1850
1.6	15 / 1150	1600 × 1550	1100	445	445	2350 × 1850
1.6	17 / 1275	2000 × 1400	1100	515	725	2700 × 2000
1.6	21 / 1600	2100 × 1600	1100	565	775	2800 × 2100
1.6	24 / 1800	2350 × 1600	1200	640	850	3050 × 2100
2	8 / 630	1100 × 1400	800	295	295	1750 × 1800
2	8 / 630	1100 × 1400	900	345	345	1950 × 1800
2	10 / 800	1350 × 1400	800	370	370	1900 × 1800
2	10 / 800	1350 × 1400	900	345	345	1950 × 1800
2	12 / 900	1400 × 1500	800	395	395	1950 × 1850
2	12 / 900	1400 × 1500	900	345	345	1950 × 1850
2	13 / 1000	1100 × 2100	800	295	295	1750 × 2400
2	13 / 1000	1100 × 2100	900	345	345	1950 × 2400
2	13 / 1000	1100 × 2100	1000	395	395	2150 × 2400
2	13 / 1000	1600 × 1400	900	445	445	2150 × 1850
2	13 / 1000	1600 × 1400	1000	395	395	2150 × 1850
2	13 / 1000	1600 × 1400	1100	445	445	2350 × 1850
2	15 / 1150	1200 × 2100	800	295	295	1750 × 2400
2	15 / 1150	1200 × 2100	900	345	345	1950 × 2400
2	15 / 1150	1200 × 2100	1000	395	395	2150 × 2400
2	15 / 1150	1600 × 1550	900	445	445	2150 × 1850
2	15 / 1150	1600 × 1550	1000	395	395	2150 × 1850
2	15 / 1150	1600 × 1550	1100	445	445	2350 × 1850
2	17 / 1275	2000 × 1400	1100	515	725	2700 × 2000
2	21 / 1600	2100 × 1600	1100	565	775	2800 × 2100
2	24 / 1800	2350 × 1600	1200	640	850	3050 × 2100
2.5	17 / 1275	2000 × 1400	1100	725	515	2700 × 2000
2.5	21 / 1600	2100 × 1600	1100	775	565	2800 × 2100
2.5	24 / 1800	2350 × 1600	1200	850	640	3050 × 2100
2.5	24 / 1800	2350 × 1600	1200	850	640	3050 × 2100




HORIZONTAL SHAFT DIMENSIONS

# Dual entrance

# Narrow frame doors


## Side opening

Speed (m/s)	Persons/ rated load (kg)	BB × DD (mm)	LL (mm)	FW1 (mm)	FW (mm)	WW × WD (mm)
1,0 - 1,6	6 / 450	1000 × 1200	800	150	450	1550 × 1810
1,0 - 1,6	6 / 450	1000 × 1200	900	150	450	1650 × 1810
1,0 - 1,6	6 / 480	950 × 1300	800	150	400	1500 × 1910
1,0 - 1,6	6 / 480	950 × 1300	900	150	450	1650 × 1910
1,0 - 1,6	6 / 480	1000 × 1250	800	150	450	1550 × 1860
1,0 - 1,6	6 / 480	1000 × 1250	900	150	450	1650 × 1860
1	8 / 630	1100 × 1400	800	150	550	1650 × 2010
1	8 / 630	1100 × 1400	900	150	450	1650 × 2010
1	12 / 900	1400 × 1500	900	150	750	1950 × 2110
1	13 / 1000	1100 × 2100	800	150	550	1650 × 2710
1	13 / 1000	1100 × 2100	900	150	450	1650 × 2710
1	15 / 1150	1200 × 2100	800	550	150	1750 × 2710
1	15 / 1150	1200 × 2100	900	450	150	1750 × 2710
1	15 / 1150	1200 × 2100	1000	500	150	1800 × 2710
1.6	13 / 1000	1100 × 2100	800	150	550	1650 × 2710
1.6	13 / 1000	1100 × 2100	900	150	450	1650 × 2710
1.6	15 / 1150	1200 × 2100	800	550	150	1750 × 2710
1.6	15 / 1150	1200 × 2100	900	450	150	1750 × 2710
1.6	15 / 1150	1200 × 2100	1000	500	150	1800 × 2710
2	13 / 1000	1100 × 2100	800	550	150	1650 × 2710
2	13 / 1000	1100 × 2100	900	450	150	1650 × 2710
2	15 / 1150	1200 × 2100	800	550	150	1750 × 2710
2	15 / 1150	1200 × 2100	900	450	150	1750 × 2710
2	15 / 1150	1200 × 2100	1000	500	150	1800 × 2710

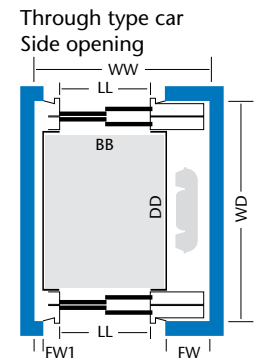

## Center opening


Speed (m/s)	Persons / rated load (kg)	BB × DD (mm)	LL (mm)	FW1 (mm)	FW (mm)	WW × WD (mm)
1	8 / 630	1100 × 1400	800	425	425	1800 × 1810
1	8 / 630	1100 × 1400	900	475	475	2000 × 1810
1	12 / 900	1400 × 1500	800	500	500	1950 × 1910
1	12 / 900	1400 × 1500	900	450	450	1950 × 1910
1	13 / 1000	1100 × 2100	800	400	400	1750 × 2510
1	13 / 1000	1100 × 2100	900	450	450	1950 × 2510
1	13 / 1000	1100 × 2100	1000	500	500	2150 × 2510
1	15 / 1150	1200 × 2100	800	400	400	1750 × 2510
1	15 / 1150	1200 × 2100	900	450	450	1950 × 2510
1	15 / 1150	1200 × 2100	1000	500	500	2150 × 2510
1.6	13 / 1000	1100 × 2100	800	400	400	1750 × 2510
1.6	13 / 1000	1100 × 2100	900	450	450	1950 × 2510
1.6	13 / 1000	1100 × 2100	1000	500	500	2150 × 2510
1.6	15 / 1150	1200 × 2100	800	400	400	1750 × 2510
1.6	15 / 1150	1200 × 2100	900	450	450	1950 × 2510
1.6	15 / 1150	1200 × 2100	1000	500	500	2150 × 2510
2	13 / 1000	1100 × 2100	800	400	400	1750 × 2510
2	13 / 1000	1100 × 2100	900	450	450	1950 × 2510
2	15 / 1150	1200 × 2100	800	400	400	1750 × 2510
2	15 / 1150	1200 × 2100	900	450	450	1950 × 2510
2	15 / 1150	1200 × 2100	1000	500	500	2150 × 2510

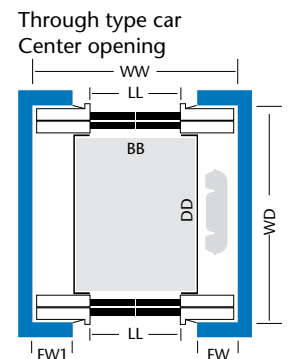

# Frame doors

## Side opening

Speed (m/s)	Persons / rated load (kg)	BB × DD (mm)	LL (mm)	FW1 (mm)	FW (mm)	WW × WD (mm)
1	8 / 630	1100 × 1400	800	45	445	1650 × 2010
1	8 / 630	1100 × 1400	900	45	345	1650 × 2010
1	12 / 900	1400 × 1500	900	45	645	1950 × 2110
1	13 / 1000	1100 × 2100	800	45	445	1650 × 2710
1	13 / 1000	1100 × 2100	900	45	345	1650 × 2710
1	15 / 1150	1200 × 2100	800	45	445	1750 × 2710
1	15 / 1150	1200 × 2100	900	45	345	1750 × 2710
1	15 / 1150	1200 × 2100	1000	45	395	1800 × 2710
1.6	13 / 1000	1100 × 2100	800	45	445	1650 × 2710
1.6	13 / 1000	1100 × 2100	900	45	345	1650 × 2710
1.6	15 / 1150	1200 × 2100	800	45	445	1750 × 2710
1.6	15 / 1150	1200 × 2100	900	45	345	1750 × 2710
1.6	15 / 1150	1200 × 2100	1000	45	395	1800 × 2710
2	13 / 1000	1100 × 2100	800	445	45	1650 × 2710
2	13 / 1000	1100 × 2100	900	345	45	1650 × 2710
2	15 / 1150	1200 × 2100	800	45	445	1750 × 2710
2	15 / 1150	1200 × 2100	900	45	345	1750 × 2710
2	15 / 1150	1200 × 2100	1000	45	395	1800 × 2710

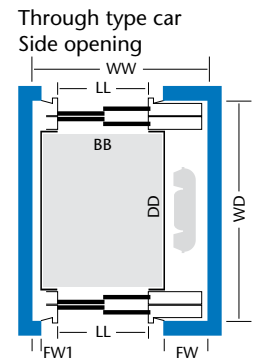

## Center opening

Speed (m/s)	Persons / rated load (kg)	BB × DD (mm)	LL (mm)	FW1 (mm)	FW (mm)	WW × WD (mm)
1	8 / 630	1100 × 1400	800	320	320	1800 × 1810
1	8 / 630	1100 × 1400	900	370	370	2000 × 1810
1	12 / 900	1400 × 1500	800	345	345	1950 × 1910
1	12 / 900	1400 × 1500	900	345	345	1950 × 1910
1	13 / 1000	1100 × 2100	800	295	295	1750 × 2510
1	13 / 1000	1100 × 2100	900	345	345	1950 × 2510
1	13 / 1000	1100 × 2100	1000	395	395	2150 × 2510
1	15 / 1150	1200 × 2100	800	295	295	1750 × 2510
1	15 / 1150	1200 × 2100	900	345	345	1950 × 2510
1	15 / 1150	1200 × 2100	1000	395	395	2150 × 2510
1.6	13 / 1000	1100 × 2100	800	295	295	1750 × 2510
1.6	13 / 1000	1100 × 2100	900	345	345	1950 × 2510
1.6	13 / 1000	1100 × 2100	1000	395	395	2150 × 2510
1.6	15 / 1150	1200 × 2100	800	295	295	1750 × 2510
1.6	15 / 1150	1200 × 2100	900	345	345	1950 × 2510
1.6	15 / 1150	1200 × 2100	1000	395	395	2150 × 2510
2	13 / 1000	1100 × 2100	800	295	295	1750 × 2510
2	13 / 1000	1100 × 2100	900	345	345	1950 × 2510
2	15 / 1150	1200 × 2100	800	295	295	1750 × 2510
2	15 / 1150	1200 × 2100	900	345	345	1950 × 2510
2	15 / 1150	1200 × 2100	1000	395	395	2150 × 2510

